



**uvex**

**A clear view on EN ISO 16321-1:2022**

Making the new protective  
eyewear standards simple

protecting people



## **Introduction**

Since 2001, EN 166:2001 has been used for CE and UKCA certification of safety eyewear in the European Union and United Kingdom.

It is now being replaced by EN ISO 16321 – a new set of international standards that will bring some significant changes to product requirements and test methods.

This guide provides the key information you need to know about the new ISO standard to ensure you can remain compliant and provide effective eye protection to keep your workplace safe.



## **Introducing the new ISO standard**

### **When does it come into force?**

EN ISO 16321 was officially published as the replacement for EN 166 in May 2023. The legal adoption date is November 2024 and only products that meet its standards may be tested and certified by official bodies from this date onwards.

However, existing EN 166 certificates which are often used for CE/UKCA markings, will remain valid until their official expiry date up to a maximum of five years. This means, for example, that any products certified or recertified according to EN 166 by 31 October 2024 can be sold legally by manufacturers until 31 October 2029. There is no end date for distributors to have sold their EN certified products by.

### **Where will it apply?**

The new ISO standard will become the official standard in many of the world's leading PPE markets including the European Union and the UK. Others – such as Russia – will retain the EN standard at this stage.

### **Why is the standard changing?**

ISO can be adopted worldwide and allows for global harmonisation of safety requirements. This is set to lead to greater consistency across international product markings over the course of the coming decade and help to ensure universal minimum standards.

## Overview of the key changes

EN ISO 16321 comprises EN ISO 16321-1:2022, EN ISO 16321-2:2021 and EN ISO 16321-3:2022. It introduces numerous changes from EN 166 regarding safety features and testing requirements.

It will involve new certificates and changes in labelling, markings, instructions and packaging for all safety eyewear.

The ISO standard includes new safety requirements and new optional features. In some cases, the new standard demands a higher level of protection. In others, the standards become less stringent.

The most significant changes are outlined in greater detail in the following pages:

EN Standard	ISO Standard	Summary
EN 166 Personal eye protection specifications:  EN 170 Ultraviolet filters EN 171 Infrared filters EN172 Solar radiation filters	EN ISO 16321-1:2022 Eye and face protection for occupational use - Part 1: General requirements EN ISO 16321-1:2022 Part 6.3.1 EN ISO 16321-1:2022 Part 6.3.2 EN ISO 16321-1:2022 Part 6.3.3	EN ISO 16321 and related parts only applies to plano and prescription glasses for occupational use or use in educational establishments. It excludes face protectors intended for live-working to protect against short-circuit electric arcs, laser protectors, sports eyewear, protectors for use during medical applications, protectors for medically prescribed applications; protectors specifically intended for protection against solar radiation only or protectors intended to protect against ionizing radiation.
EN 169 Filters for welding and related techniques.	EN ISO 16321-2:2021 Eye and face protection for occupational use — Part 2: Additional requirements for protectors used during welding and related techniques	The new EN ISO 16321-2 standard is broader than EN169 as it applies to complete eye and face protectors used in welding and similar techniques. It includes additional considerations such as frame design and materials suitable for withstanding welding heat and sparks-compatibility with respiratory equipment.
EN 1731 Mesh type eye and face protectors for industrial and non-industrial use against mechanical hazards and heat.	EN ISO 16321-3:2022 Eye and face protection for occupational use — Part 3: Additional requirements for mesh protectors	Used alongside EN ISO 16321-3:2022, this standard defines the requirements for mesh eye and face protectors which protect against mechanical hazards like flying particles and debris. Notably, a key difference from the older EN 1731:2006 standard lies in the mesh design, particularly the aperture count.
EN 167 Personal eye protection - optical test methods	EN ISO 18526-1:2020 Eye and face protection - Test methods Part 1: Geometrical optical properties	The EN 167 standard focuses on optical testing methods for eye protection lenses whereas the EN ISO 18526-1:2020 is a broader standard focusing on geometrical optical testing methods for a wider range of eye and face protection.
EN 170 Ultraviolet filters EN 171 Infrared filters EN172 Solar radiation filters	EN ISO 18526-2:2020 Eye and face protection — Test methods — Part 2: Physical optical properties (Filters)	The new ISO 18526-2:2020 standard provides a single source of information for testing all types of filters. It uses more advanced testing methods and promotes consistency across different types of eye and face protection.



EN 168 Personal eye protection - non-optical test methods	EN ISO 18526-3:2020 Eye and face protection — Test methods —Part 3: Physical and mechanical properties	The new ISO standard covers more test methods for both eye and face protection building upon EN168 with a wider range of tests including specific hazards like splashes of molten metals, chemicals, or hot liquids. It also covers the complete eye protector and not just the lens.
-	EN ISO 18526-4:2020 Eye and face protection — Test methods — Part 4: Headforms	Tests eyewear on six different head and facial sizes intended to replicate 95% of the world's population.




## Safety requirements

### Headforms:

The biggest change in the new ISO standard concerns headforms. Head shapes and sizes can differ significantly from person to person. EN 166 specified only medium and small headforms, with the vast majority of testing carried out on the medium size. This approach all too frequently led to a one-size-fits-all approach to safety eyewear that compromised workers' comfort and their equipment's performance.

ISO 16321 covers six different options which, following extensive international research, represents around 95% of head shapes and sizes of the world's population. Manufacturers must carry out tests based on the fit and coverage area of the specific headform. If a product is certified only to size M no marking is required on the product. However, if a product fits multiple head sizes the marking denoting this can be found on the product and/or on the product's packaging.

	Small	Medium	Large
European heads	1-S	1-M	1-L
Asian heads	2-S	2-M	3-L

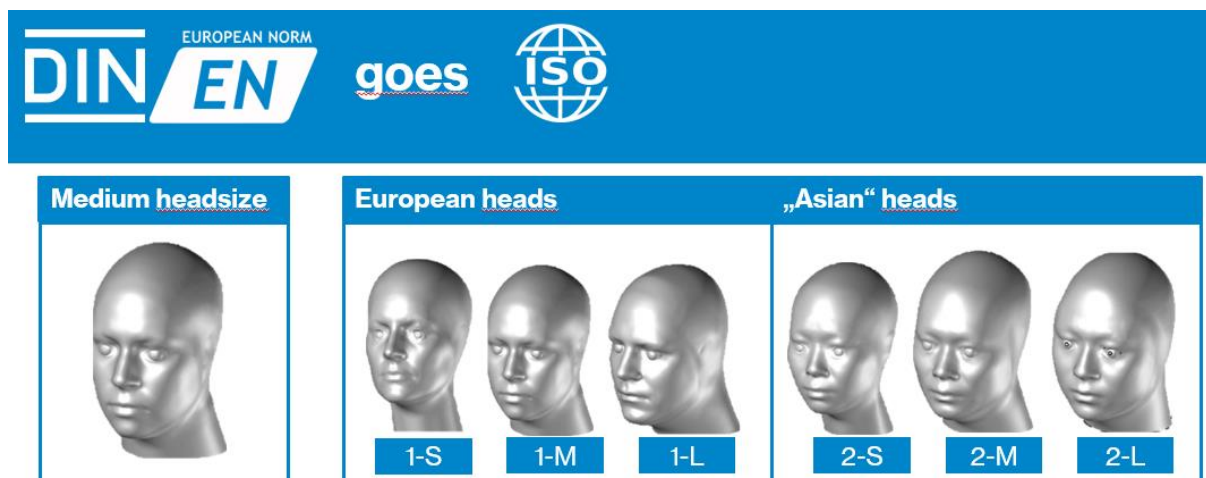

At uvex, we have always made it a priority to provide PPE that fits. We already run a highly successful eyewear fit programme that considers the employee's facial features, work environment and personal requirements, including compatibility with other PPE.

Our current range includes a broad array of options to suit different headforms and we are planning to secure multiple certifications in line with the ISO 16321 standard. This will include premium adjustable models with innovative features to ensure the ultimate close fit as well as models that are available in different sizes.





## Mechanical strength

Mechanical strength, otherwise known as the impact strength, is crucial in safety eyewear to protect the eyes from potential injuries caused by flying debris, projectiles or other impacts in hazardous work environments. A “bullet test” is carried out to determine the mechanical impact resistance against projectiles based on their speed, as measured in metres per second.

In the old EN166:2001 standard there were different levels of impact resistance ranging from increased robustness in the drop ball test (level S), low energy impact resistance (level F), medium energy impact resistance applicable for goggles (level B) and high energy impact (level A) used only for face shields.

The new standards introduce three new impact levels (C, D, and E) alongside revised velocity speeds.

The ISO standard also introduces a requirement for “protection zones”, with their sizes determined by the potential speed of the projectiles in the workplace. Eyewear under impact level C must include an orbital protection zone (OPZ), eyewear under impact level D must include an extended orbital protection zone (EOZ), and eyewear under impact level E must include a face protection zone (FPZ). These "protection zones" outline minimum areas of coverage to protect the wearer. The higher the speed of impact, the larger the protection zone coverage.

Product type	uvex example	Old EN166 / 168 Impact resistance level and velocity	New ISO 16321-1 Impact resistance level and velocity	New ISO 16321-1 Protection Zone
Eye protection		S Drop ball test	Drop ball test (No Marking)	-
Eye protection		F 45 m/s	C 45 m/s	Orbital Protection zone (OPZ)
Eye protection		B 120 m/s	D 80 m/s	Extended orbital protection zone (EOZ)
Face guard		A 190 m/s	E 120 m/s	Face protection zone (FPZ)

m/s = metres per second



This reduced requirement reflects the global harmonisation of the standard, with EN 166 having offered a uniquely high level of testing. At uvex, we have our own in-house standards known as the uvex house norms. To guarantee the high quality and integrity of our products we exceed industry regulations with our own rigorous tests that go beyond the standard requirements. As a result, uvex will continue to test products to the higher speeds of the European impact standard EN 166:2001. While products under impact level D (80m/s) will be marked as such, our products will still conform to the EN166 B (120 m/s) test.



## Lens filters


Integrated filters in the lens must fulfil a range of requirements to protect the eyes from the various dangers of optical radiation. They may also require additional features, such as the ability to accurately transmit and differentiate colours as required for specific signalling or warning systems.

The protective features under the new ISO standard remain largely the same as under EN 166, but the markings will change.

## Ultraviolet protective filters

UV filters are designed to protect the eyes from harmful UV radiation. UV radiation can come from the sun (UVB and UVA radiation) as well as from artificial light sources such as (UVC, UVB and UVA radiation).

UV lens filter marking according to old EN 166/EN170	UV lens filter marking according to new EN ISO 16321-1:2022	Meaning in terms of light transmittance	Lens shade
2-1.2	U1.2	$\geq 74.4\%$ of the visible light is transmitted	Mostly clear or yellow tints
2-1.4	U1.4	Between $<74.4\%$ and $\geq 58.1\%$ of the visible light is transmitted	Mostly lenses with a slight tint like grey or brown for indoor and outdoor work combined
2-1.7	U1.7	Between $<58.1\%$ and $\geq 43.2\%$ of the visible light is transmitted	Mostly lenses with a slight tint like grey or brown for indoor and outdoor work combined
2-2	U2	Between $<43.2\%$ and $\geq 29.1\%$ of the visible light is transmitted	
2-2.5	U2.5	Between $<29.1\%$ and $\geq 17.8\%$ of the visible light is transmitted	Tinted "sunglass" lenses like grey or brown to protect your eyes from 'regular' glare
2-3.1	U3	Between $<17.9\%$ and $>8.5\%$ of the visible light is transmitted	Tinted "sunglass" lenses like grey or brown to protect your eyes from extreme glare
2-4	U4	Between $<8.5\%$ and $\geq 3.2\%$ of the visible light is transmitted	
2-5	U5	Between $<3.2\%$ and $\geq 1.2\%$ of the visible light is transmitted	
2C + filter: compliant for signalling lights (colour recognition)	UL + filter: compliant for signalling lights (colour recognition)		



Signal recognition remains an optional test under the EN ISO 16321-1:2022 (as it did under EN170) however, it is depicted by the L marking - if it meets the standard, instead of the previous C.

## Sunglare filters for occupational use

Sun protection filters are mainly intended to protect the eye from natural glare and the sun's natural UV radiation (UVB and UVA radiation).

Sunglare protection filter <u>marking</u> according to the <u>old</u> EN 166/EN 172	Sunglare protection filter <u>marking</u> according to the <u>new</u> EN ISO 16321-1:2022	Meaning in terms of light transmittance
5-1.1	G0	$\geq 80\%$ of the visible light is transmitted
5-1.4	G1	Between $<80\%$ and $\geq 43\%$ of the visible light is transmitted
5-1.7		
5-2	G2	Between $<43\%$ and $\geq 18\%$ of the visible light is transmitted
5-2.5		
5-3.1	G3	Between $<18\%$ and $\geq 8\%$ of the visible light is transmitted
5-4.1	G4	Between $<8\%$ and $\geq 3\%$ of the visible light is transmitted
5 + filter: compliant for signalling lights (colour recognition) – test was already integrated	GL + filter: compliant for signalling lights (colour recognition), G4 is not compliant with L	




Signal colour recognition was mandatory under EN172 however, this is now an optional test under EN ISO 16321-1:2022 and depicted with the L marking.

## Infrared protective filters

Infrared filters are designed to protect the eyes from heat radiation, such as that emitted by molten glass or metal, fire, and artificial heat emitters. The protection level increases with the average temperature of the heat source. The new ISO standard introduces the option for enhanced infrared reflection, which is marked with an additional R.

Infrared protection filter marking according to the old EN 166/EN 171	Infrared protection filter marking according to the new EN ISO 16321:1:2022
4-1.2	R1.2
4-1.4	R1.4
4-1.7	R1.7
4-2	R2
4-2.5	R2.5
4-3	R3
4-4	R4
4-5	R5
4-6	R6
4-7	R7
4-8	R8
4-9	R9
4-10	R10
	Amended criteria: now 1 requirement for the whole area 780-3000 nm
4C + filter: compliant for signalling lights (colour recognition)	RL + filter: compliant for signalling lights (colour recognition)
-	RR + filter (with increased IR reflection)
-	RRL + filter (with colour recognition and increased IR reflection)

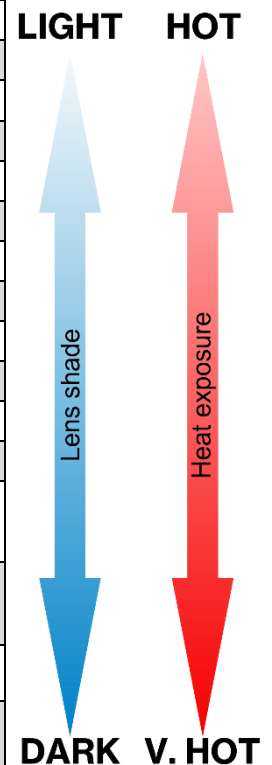

Signal recognition remains an optional test under the EN ISO 16321:1:2022 (as it did under EN171) however, it is depicted by an L if it meets the standard (instead of a C).

## Welding filters

The heat and intense brightness created during welding would cause irreparable damage to the eyes without proper protection.

Compliance for signalling lights was not part of the tests under the EN standard but this has been introduced under EN ISO 16321-2:2022 as an optional test and is depicted with the L marking. This means that signal colours remain unaffected by the lens shade.

Welding lens filter marking according to the old EN 166/EN 169	Welding lens filter marking according to the new EN ISO 16321:2:2022
1.2	W1.2
1.4	W1.4
1.7	W1.7
2	W2
2.5	W2.5
3	W3
4	W4
5	W5
6	W6
7	W7
8	W8
9	W9
10	W10
Compliance for signalling lights (colour recognition) was not part of the tests	WL + filter: compliant for signalling lights (colour recognition)



## Optional features

Further markings can be included on eye and face protection where additional safety features are included and meet the testing requirements set out in the ISO standard.

Summary of optional requirements include:

Resistance against fogging	High mass impact <b>NEW</b>
Resistance to surface damage by fine particles	Protection against radiant heat <b>NEW</b>
Protection against gases and fine dust particles	Protection against streams of liquid <b>NEW</b>
Protection against large dust particles	Lens assessment for anti-reflective coatings <b>NEW</b>
Protection against molten metals and hot solids	Use in explosive atmospheres <b>NEW</b>
	Chemical resistance <b>NEW</b>

Under both the EN and EN ISO standards, **several optional features and markings remain the same**, albeit with slight modifications to some test procedures. The updates in these tests aim to harmonise standards and provide more concrete procedures for manufacturers and test laboratories. These include:

Marking	Feature	Description
K	Resistance to surface damage by fine particles	Plastic is a very impact-resistant lens material but is also very soft and susceptible to scratches. For this reason, almost all safety spectacles are provided with an additional coating that can fulfil different tasks. In this optional test, sand trickles onto the lens and the degree of scratching is then measured in haze percentage. If the haze remains below 8%, the eye protection device qualifies for the marking. Lenses coated with uvex supravision sapphire are extremely scratch resistant on both sides whereas lenses coated with supravision excellence or supravision extreme are scratch resistant on the more dirt-prone outside of the lens and fog-free on the inside of the lens which is prone to fog-up due to sweat etc.
N	Resistance against fogging	Fogged-up glasses pose a safety risk. This test requires lenses to remain fog-free for a minimum of eight seconds when exposed to an atmosphere above 50°C. However, simple anti-fog coatings wash out relatively quickly and become ineffective. For this reason, the lenses are placed in water for 2 hours before the anti-fog test to simulate this premature washing out. Lenses coated with uvex supravision excellence are anti-fog for at least 16 seconds and the coating is permanent and will not wash off even after repeated cleaning. uvex supravision plus coatings provide permanent anti-fog for at least 30 seconds. With uvex supravision extreme or supravision ETC fogging is not possible as the coating does not become saturated.
3	Protection against droplets	Under EN 166, goggles were tested by spraying liquids on frontally. Visors were measured to determine whether the surface was large enough to cover the face, with no liquid testing required. However, under EN ISO 16321-1:2022, the testing method has changed, with the droplets projected onto the visor in all directions.
4	Protection against large dust particles	For extremely dusty activities, very tight-fitting safety eyewear or even full-vision goggles are required.
5	Protection against gases and fine dust particles	Goggles with this marking are often referred to as gas-tight full-vision goggles or full-vision goggles without ventilation.

T	Mechanical strength at extreme temperatures	Materials can behave very differently at extreme temperatures. To ensure sufficient mechanical protection at such temperatures, impact tests can also be carried out with products that have previously been preconditioned to +55°C and -5°C. While this feature was available under the EN standard, the tests now cover four impact levels: C (45m/s), D (80m/s), E (120m/s) and high mass.
---	---	--

**Some markings have seen slight changes** under the ISO standard with regard to range of eligible products. These include:

Marking	Feature	Description
9	Protection against molten metals and hot solids	This test examines the non-adhesion and rapid penetration of hot, liquid metals on the lens and frame, as can occur when working in the metal industry. This marking no longer applies to goggles as molten metal presents a risk to the entire face. uvex stopped producing goggles in 2021 with the 9 marking for this exact reason.

EN ISO 16321-1:2022 also introduces a range of features that did not appear under EN 166. Some of the **new developments** are featured below:

Marking	Feature	Description
HM	High mass impact	This means mechanical protection against larger objects is tested at a reduced speed. This is adopted from the American standard for safety spectacles. uvex already carries out high mass impact testing in accordance with the ISO requirements and will mark products accordingly.
CH	Chemical resistance	Unlike hand protection, there has not yet been an eyewear test procedure that confirms safe use when handling chemicals. The new ISO test involves pouring 100ml of sulphuric acid (30%), sodium hydroxide (10%), P-xylene, 1-Butanol and N-heptane over the full shield including the assembly system in 10 seconds and then leaving for five minutes. Visible deformation of the protector is not permitted, the image must not be distorted, and the assembly system must still work. Impact is also tested, as is resistance to ignition.
6	Protection against streams of liquids	This marking demonstrates that the protector prevents a high-pressure liquid stream from reaching the eyes of the wearer. Under ISO, this marking can be applied to goggles and visors.
7	Protection against radiant heat	This test is intended to determine whether the protector will protect the wearer's face from radiant heat for a specified time. It only applies to a shield with a headband or helmet with an IR filter. The test is based on studies of typical fire conditions and any damage indicates that it may not protect the wearer's eyes from the radiant heat.
	Use in explosive atmospheres	For protectors that are intended to be used in explosive atmospheres, and if the principal ignition source is electrostatic, the eyewear is tested according to ISO 80079-36:2016, Annex D.

These advancements offer users more specific information about the safety eyewear required for specialised environments.





**uvex always sets the standard in safety**

We know that changes to standards can be challenging. With the introduction of EN ISO 16321, safety professionals now have to get to grips with a range of new requirements.


There's no need for alarm. If you buy your eyewear from uvex, you're already ahead of the game. We don't just comply with all legally required standards; we produce products to overperform – following safety guidance as an Approved Code of Practice (ACOP) and then waiting for the legislation to catch up.

We design **WEARABILITY** and exceptional safety into every product we produce. Our range includes a vast array of sizes, styles and safety features that not only meet the new ISO standards but frequently go above and beyond the minimum requirements.

## uvex fitting guide

### Useful tips for making sure that your uvex safety eyewear fits perfectly

It may seem obvious, but properly-fitting eyewear is crucial for a wearer's safety helping to reduce accidents, discomfort and increase compliance. Wearing just any safety eyewear is not enough to protect your eyes. Head and face shapes vary considerably, so it's impossible to something that fits you best. Follow the simple guide to check for gaps, pressure points and secure fitting to ensure your eyewear gives you the best possible protection.

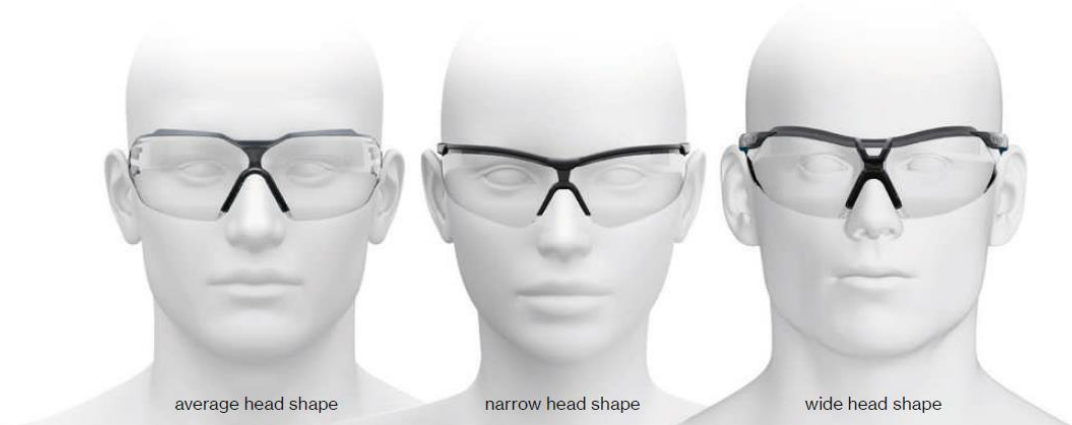

#### Selecting the right model

##### Pay attention to:


- a close fit with good eye coverage
- offers a good field of vision
- adjustable to improve fit



The wide range of uvex styles and designs allows you to find the product that most suits you. At uvex, we offer a range of lens shades and coatings to suit a variety of workplace environments and light conditions. All uvex lens options will provide 100% UV protection. Choose the style and type of frame that suits you and the environment you are working in.

#### Checklist

- 1 No uncomfortable pressure points on the side of the head or behind the ears.
- 2 Nose piece sits on nose without pinching or sliding.
- 3 You should be able to see in all directions without your peripheral vision being obstructed.
- 4 The lens should cover the eyebrow, eye socket and any soft tissue around it.

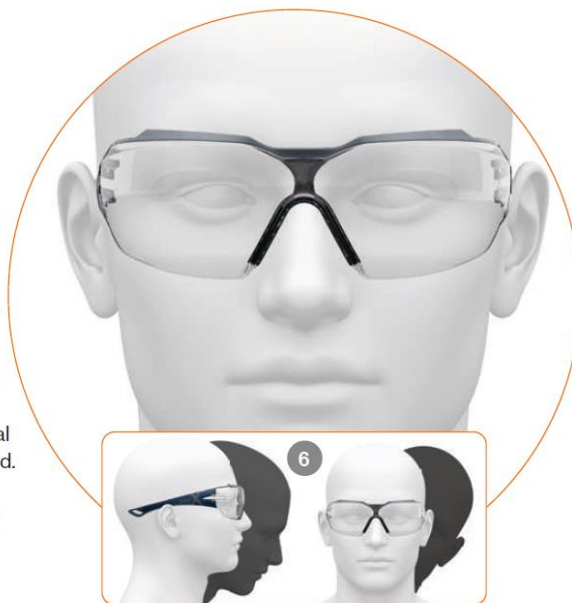

- 5 The overall weight of the safety eyewear is evenly distributed.
- 6 The eyewear should fit close to your face without touching your eyelashes. There should be no gaps along the top, bottom or sides.
- 7 The eyewear should remain comfortable and in place when you move your head forwards or backwards and tilt your head side to side.